


Revisions

- B- July, 1991
- C- March, 1993
- D- Feb., 1996

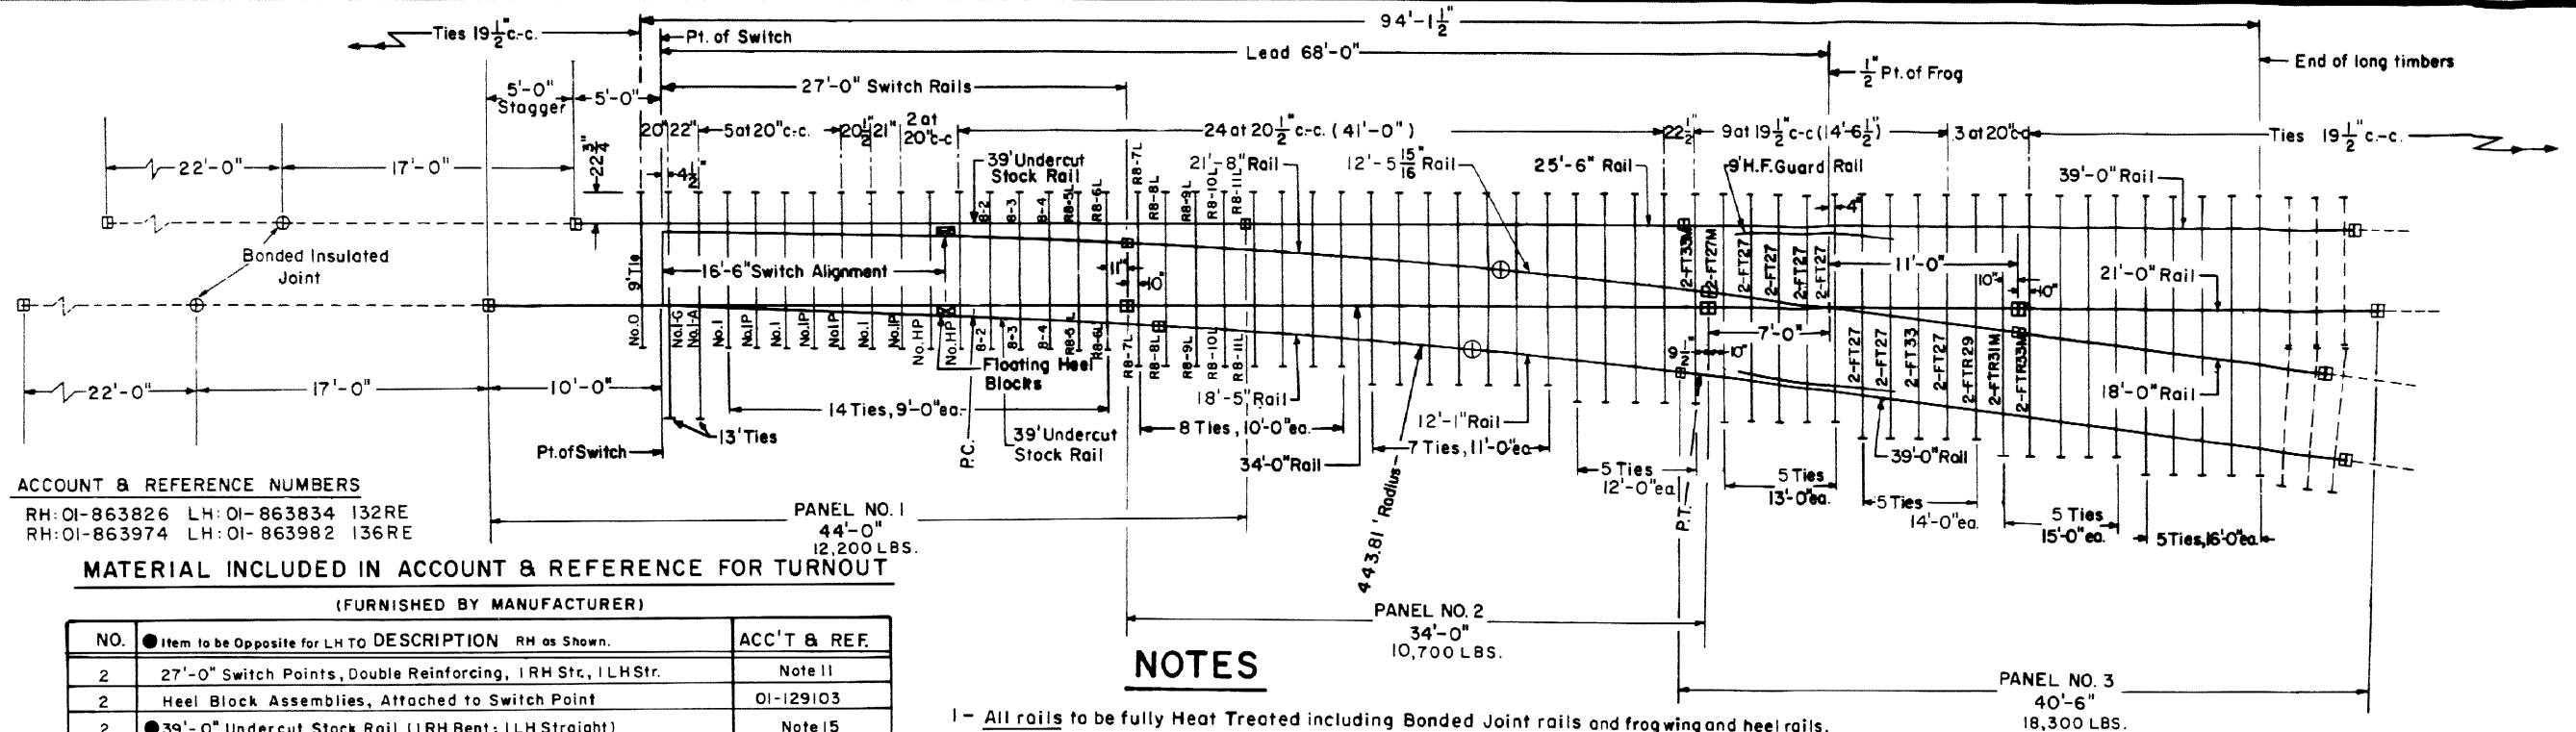

ACCOUNT & REFERENCE NUMBERS
 RH: 01-863826 LH: 01-863834 132RE
 RH: 01-863974 LH: 01-863982 136RE

MATERIAL INCLUDED IN ACCOUNT & REFERENCE FOR TURNOUT

(FURNISHED BY MANUFACTURER)

NO.	Item to be Opposite for LH TO DESCRIPTION	RH as Shown.	ACC'T & REF.
2	27'-0" Switch Points, Double Reinforcing, 1RH Str., 1LH Str.		Note 11
2	Heel Block Assemblies, Attached to Switch Point		01-129103
2	39'-0" Undercut Stock Rail (1RH Bent; 1LH Straight)		Note 15
1ea	No. 1 W/Basket, No. 2, No. 3 Ins. Vertical Switch Rods		Note 12
12	Adjustable Rail Brace CR Plan 73515-()		01-250354
1	No. 1-G Insulated Gage Plate CR Plan 73519-()		01-504008
2	No. 0 Adjustable Brace Slide Plate CR Plan 73519-()		01-526001
2	No. 1-A Adjustable Brace Slide Plate CR Plan 73519-()		01-526027
6	No. 1 Adjustable Brace Slide Plate CR Plan 73513-()		01-526019
12	No. 1-P Shoulder Slide Plate CR Plan 73513-()		01-526035
2ea	Turnout Plates 8-2 thru 8-11 CR Plan 72220-() (1-Set)		Various
2	39'-0" Rail		
1ea	34'-0", 21'-0", 18'-0", 25'-6", 21'-8", 18'-5", 12'-1", 12'-5 15/16" Rail		
1	No. 8 RBM Frog CR Plan 74160-()		01-332673
2	9'-0" Hook Flange Guard Rail CR Plan 71810-()		01-552452
714	5/8 x 6" AREA Spikes		01-781428
48	Cone Neck Drive Spikes 3/4 x 6"		01-754009
228	Rail Anchors		01-017704
112	Tie Plates CR Plan 72022-()		01-534302
14	FT 27		01-489200
2	FTR 29		01-489366
2	FT 27 Mod.		01-489408
2ea	FTR 31 Mod., FTR 33 Mod.	01-489440,	01-489184
2ea	FT 33, FT 33 Mod.	01-489242,	01-489465

NOTES

- 1- All rails to be fully Heat Treated including Bonded Joint rails and frog wing and heel rails.
- 2- Switch rails to be samson.
- 3- 39'-0" stock rails to be undercut as per Plan 73167-().
- 4- For switch details see Plan 73180-().
- 5- Gage plate No. 1-G as per Plan 73519-().
- 6- Switch plates Nos. 0, 1, 1A and 1P as per Plan 73519-().
- 7- Turnout plates No. 8-2 thru 8-11 as per Plan 72220-().
- 8- Vertical insulated switch rods and adjustable rocker clips, generally as per Plan 73518-().
- 9- Floating heel block as per Plan 73180-().
- 10- All rails, including switch rails, to be drilled per Conrail Plan 71015-() or 71016-(), except that first hole is not to be drilled by the manufacturer. Conrail forces to field drill first hole where necessary.
- 11- 27'-0" (16'-6" Str. Alignment) Account and Reference Numbers:
 RH Str. 01-653383 LH Str. 01-653391 CR Plan 73180-().
- 12- Vertical Switch Rods (16'-6" Str. Alignment) Acc't & Ref. Nos.
 No. 1 Rod W/Basket 01-710761 No. 2 Rod 01-710779
 No. 3 Rod 01-710803 CR Plan 73518-().
- 13- Bonded Insulated Joint Furnished with Turnout and manufactured by Approved Vendor.
- 14- Frog Tie Plates as per Conrail Plan 72105-().
- 15- 60'-0" Undercut Stock Rail Account and Reference Number (No Hand)
 08-455501. To be ordered as a replacement as per CR Plan 73062-().
- 16- HP Plates under Heel Block are the same as IP Plates except 24" long.
- 17- All rails must meet CR MW180 Specs.
- 18- Item Numbers shown are for 132/136, except Switch Points, Stock Rails and Frog which are 132RE only. See Plan 73210-() for 136RE Item Numbers.
- 19- On Non-Insulated Turnouts T.O. and closure rails are to be continuous. No Joint.

TIMBER SHIPPED WITH TURNOUT

QUANTITY	LENGTH
15	9'-0"
8	10'-0"
7	11'-0"
5	12'-0"
7	13'-0"
5	14'-0"
5	15'-0"
5	16'-0"
57	Total

LEGEND

- Indicates rails furnished by the manufacturer.
- - - Indicates rails furnished by Conrail.
- + Indicates standard bolted joint with 1/8" opening.
- ⊕ Indicates Bonded Insulated Joint.
- ⊞ Indicates field welded joints.

CONRAIL

STANDARD

No. 8 PANELED WELDED TURNOUT TIE AND RAIL LAYOUT-132/136

MARCH, 1986

73206-D

J.R. Clark
 Chief Engineer - Maintenance of Way

A.G. Carbone
 Chief Engineering Officer