



ITEM	NAME	REQ	REF	ACCT NO
1	Bolt, 5/16-18x2 Hex. Hd.	3		
2	Nut, Hex.-5/16-18	3		
3	Post 8'-0" long	1		02-372173
4	Sign, channel 1&2	1	7011-1	02-487328
5	Washer, 5/16, plain	3		
6				
7				

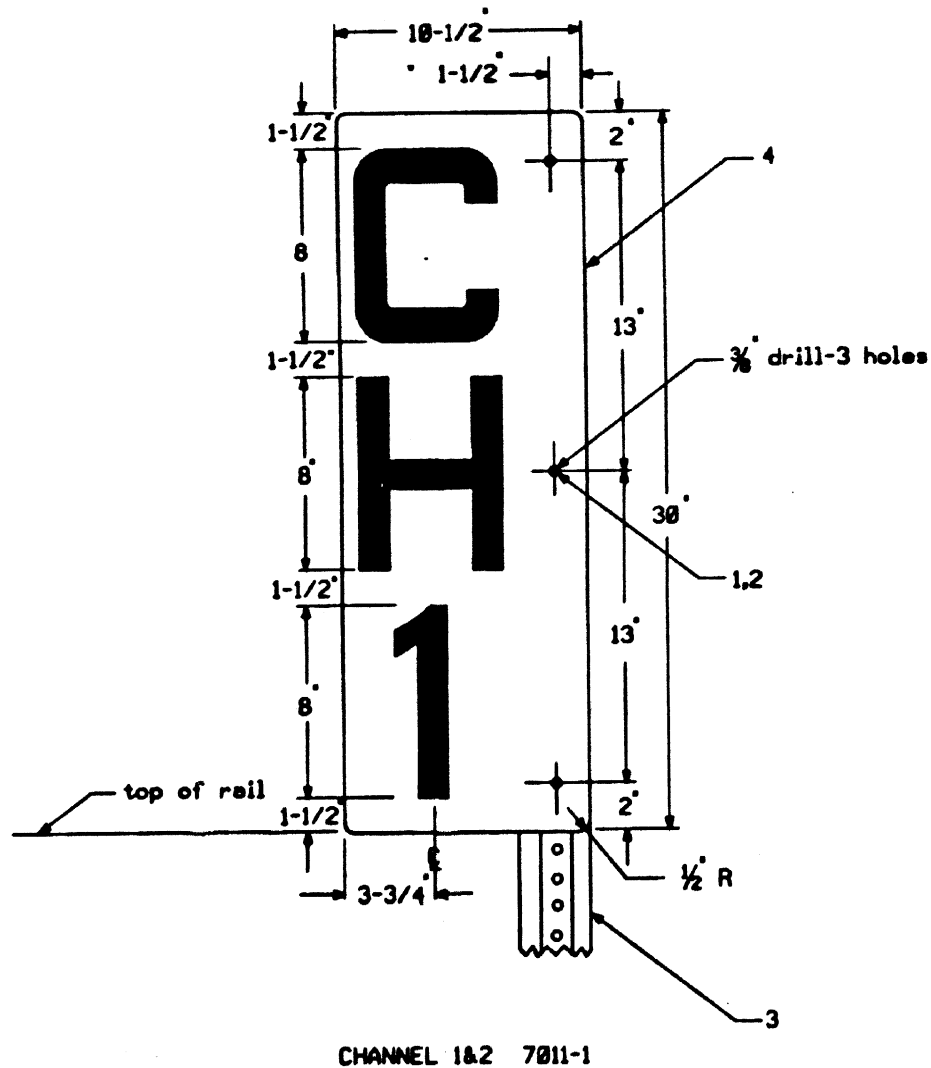

CHANNEL 1&2 7011-1

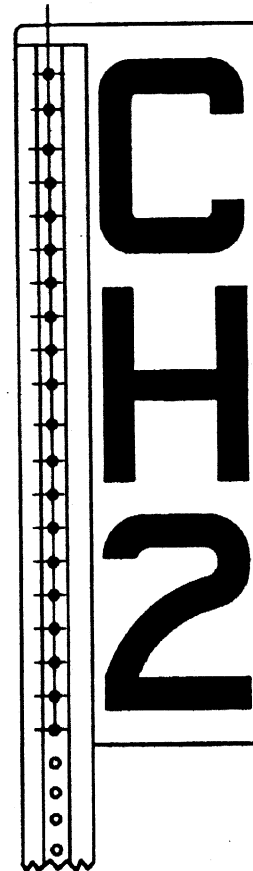

CHANNEL 1&2 7011-1

NOTES:

1. Sign shall be mounted and located on 8'-0" post with anchor plate in accordance with M/W Plan 78480.
2. Sign shall be made of .081" - 6061-T6 Aluminum sheet with both faces covered with No 2870 Wide Angle Silver Flat Top Scotchlite and No 605 Black Scotchcal letters, or equivalent.
3. Sign shall be made at Sign Shop in Canton, Ohio or by an outside manufacturer in accordance with specifications.
4. Signs for single track railroad shall be located on the mile post side. Signs for multiple tracks shall be located on both sides of railroad. All signs shall be located not less than 8'-0" nor more than 20'-0" from gauge of nearest rail.
5. Bolts, nuts and washers must be cadmium plated.
6. Proportions of letters to be in accordance with M/W plan 78010.
7. Sign channel 1&2 illustrated front & back.

SHEET 1

CONRAIL  **CS-7011**
STANDARD

RADIO CHANGE CHANNEL SIGN

Approved  Chief Engineer C&S  Chief Engineering Officer

ISSUE DATE: Oct. 16, 1966

REV. - -